

SELECT SURFACES

Engineered Molding Installation Instructions

T-MOLDING


T-Moldings are used to fill the gap between two floors of equal height.

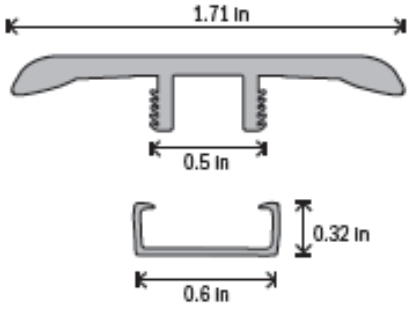

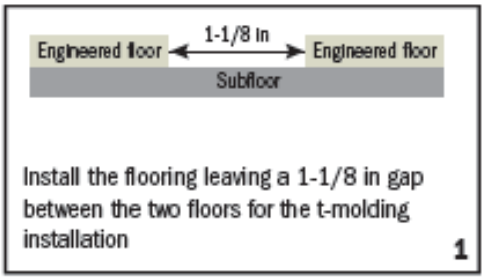


Install the flooring leaving a 1-1/8 in gap between the two floors for the t-molding installation

1

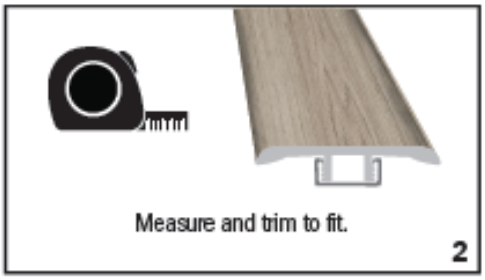


Measure and trim to fit.

2

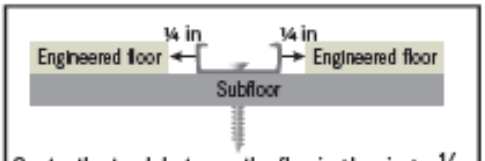

Center the track between the flooring leaving a ¼ in spacing between the track and floor planks. Screw track to subfloor (or glue down with construction adhesive). *Many need to use supplied shim

3

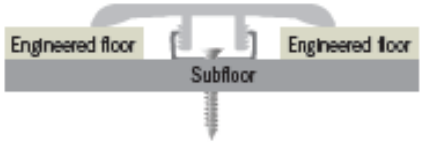


Starting at one end, press the molding into the track inching along the length of the molding.


You may also use a rubber mallet.

4

REDUCER

Surface reducers are used to fill the gap between floors of unequal heights

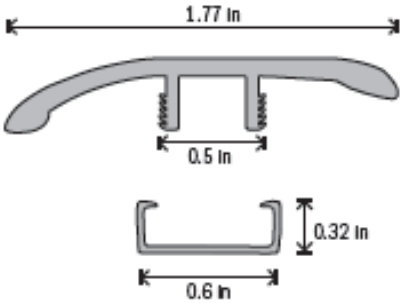

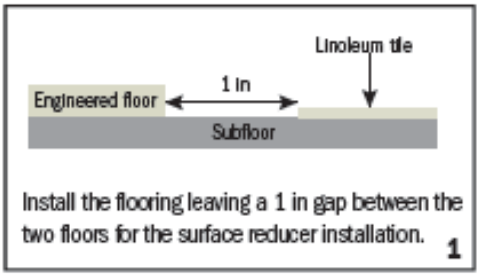


Install the flooring leaving a 1 in gap between the two floors for the surface reducer installation.

1




Measure and trim to fit.

2

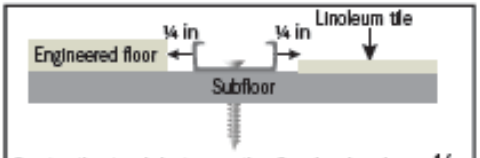

Center the track between the flooring leaving a ¼ in spacing between the track and floor planks. Screw track to subfloor (or glue down with construction adhesive). *Many need to use supplied shim

3

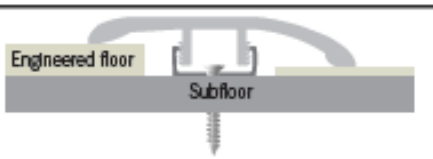


Starting at one end, press the molding into the track inching along the length of the molding.


You may also use a rubber mallet.

4

END CAP


End caps are used to fill the gap between the floor and carpet, hearths or against sliding doors creating a finished edge.

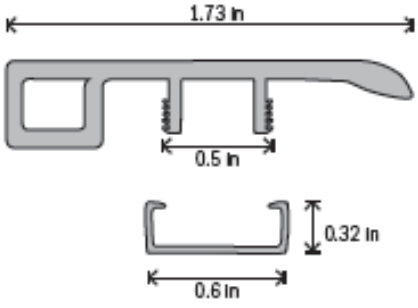

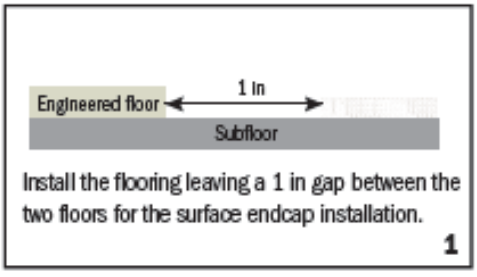


Install the flooring leaving a 1 in gap between the two floors for the surface endcap installation.

1

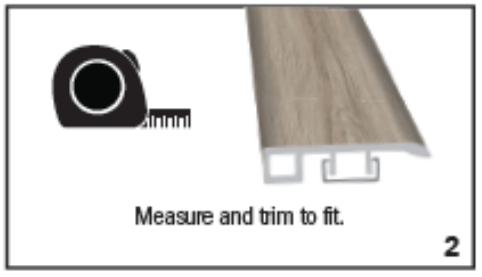


Measure and trim to fit.

2

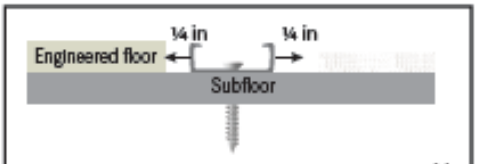

Center the track between the flooring leaving a ¼ in spacing between the track and floor planks. Screw track to subfloor (or glue down with construction adhesive).

3

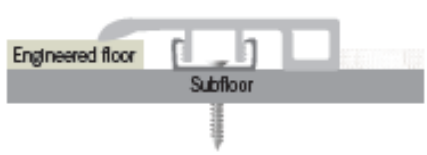

Starting at one end, press the molding into the track inching along the length of the molding.

You may also use a rubber mallet.

4

SELECT SURFACES

Engineered Molding Installation Instructions

WARRANTY

Select Surfaces™ molding kits for engineered harwood flooring are covered by a limited lifetime warranty for residential use. The stipulations of the residential warranty are as follows:

- **The flooring will be free from manufacturing defects.The following conditions apply to the warranty and may void the warranty if not followed correctly:**
- **The flooring and moldings must be installed according to the instructions provided.**
- **If filing a warranty claim, it must be submitted within 30 days of the discovery of the damage.**
- **Proof of purchase, such as a bill of sale is mandatory when requesting warranty service.**
- **The warranty is non-transferable and applies only to the original purchaser.**
- **The manufacturer reserves the right to designate a representative to inspect the floor in question and remove samples for analysis.**
- **Removing product prior to contacting Select Surfaces™ Claims Department voids the warranty.**
- **The warranty includes the replacement material and excludes labor costs.**
- **Upon approval of a warranty claim, Select Surfaces™ will provide the claimant with instructions on how to proceed to have the product repaired or replaced.**

The claimant has 90 days to comply with the instructions. If the claimant fails to do so within 90 days, all rights under the limited warranty are waived.

WARRANTY EXCLUSIONS

- **Damage due to improper installation, care, cleaning, or maintenance.**
- **Use of any solvent material during installation.**
- **Installation of product in an outdoor/exterior setting or in any type of garage.**
- **Scratches, dents (gauges) scuffmarks, water damage, breakage of the locking system, breakage of the core, chipping corners or edges, buckling issue, planks separation caused by lack of expansion and contraction, unevenness of subfloors or underlayment used. Peeling of the décor paper cause by breakage of the core.**
- **Scratching or clawing or any similar damage caused by pets.**
- **The use of Engineered Molding Kits in an unheated environment such as a cottage, RV or solarium.**
- **The molding kit dulled by soaps, detergents, harsh chemicals, dressings, one-step cleaners or wax.**
- **Damage caused by high heels, burns, cigarette burns, cuts, scratches, gouges, and indentations including damage from improper floor protectors and furniture rests; staining caused by dyes racked from carpet, fertilizers, coal, tar, driveway sealers, oil drippings or other similar materials.**
- **Problems due to moisture and/or alkalinity of the subfloor.**
- **Installation-related damage, and damage caused by fire.**

Any issue caused by faulty installation of the flooring.

- **Discoloration from mold or from flooding, leaking plumbing or appliances, water entering through sliding glass doors or similar conditions.**
- **Discoloration caused by using area rugs or floor mats. Use non-staining mats for rubber mats will discolor the floor.**
- **Discoloration by exposure to direct sunlight or heat generation.**

NOTE: The warranty is not transferable. It extends only to the original end use purchaser.